



Dual O2/CO2 Monitor, 0-25% and 0-10,000ppm

ITEM #: 99039

ITEM #: 99122-Incl Optional 10' Remote CO2 Cable

Product Summary

PureAir Monitoring Systems Dual Oxygen/Carbon Dioxide Monitor is designed for continuous monitoring of oxygen and carbon dioxide in confined spaces. The monitor is ideal for facilities that use inert gases including, but not limited to, nitrogen, helium, carbon dioxide, and argon. The O2/CO2 monitor is perfect for environments such as breweries, food processing plants, laboratories, hospitals, and universities. The monitor will remain accurate at temperatures as low as -40C. PureAir's durable, non-depleting, zirconium oxide sensor cell and non-dispersive infrared sensor (NDIR) cell, will last up to 10+ years in a normal environment, without needing to be replaced.

Facilities That Need This Product

- *Pharmaceutical*
- *Hospitals*
- *Universities*
- *Breweries*
- *Food Processing*
- *Laboratories*

FEATURES

- No maintenance zirconium O2 cell and long life CO2 sensor
- No calibration required for oxygen
- Self-calibrating CO2 sensor
- Local backlit concentration display
- Built-in audible horn
- Built-in visual LED alarm indicators
- Alarm level 1 for CO2 and Alarm level 2 for O2
- No drift due to environmental or temperature changes
- 3-year warranty
- 24V DC Power Supply Included

Why choose PureAir?

PureAir Monitoring Systems, Inc. is an industry leader in oxygen monitoring and gas detection. For over 20 years, we have dedicated ourselves to the safety of our clients, and the customers they serve, by manufacturing monitors that are long-lasting, accurate, and reliable. PureAir takes pride in providing exceptional customer service, along with 24/7 availability to our technical service department.

Why a Dual O2/CO2 Monitor?

A Dual O2/CO2 Monitor is a stand-alone system ideal for the continuous monitoring of nitrogen or cryogenics near freezers, confined spaces, and other locations where low oxygen levels and high carbon dioxide levels may pose a hazard to personnel.

What gases can be detected with a Dual O2/CO2?

PureAir's dual O2/CO2 monitors can be used to measure O2/CO2 levels in an ambient atmosphere where inert gases, including nitrogen, argon, helium, and carbon dioxide are used.

Easy to Use

The monitor will arrive ready to work right out of the box. Secure the monitor to the wall at a height that is easily visible 3-5 feet from the gas source, plug in the monitor. The optional remote cable allows for CO2 monitoring up to 10 feet from the transmitter. The monitor will begin sampling O2/CO2 levels after a brief startup period. Oxygen/Carbon Dioxide levels are displayed clearly on the screen for easy access and availability.

Top Advantages of Dual O2/CO2 Monitor




Dual O2/CO2 Monitor Alarm Features

PureAire's Dual O2/CO2 Monitor has 2 adjustable alarm setpoints that can connect to a horn/strobe, 8 channel controller, remote display, or into building systems. Alarm signals also can tie into automatic shut-off valves when oxygen levels fall below the OSHA threshold.



Easy To Use

PureAire's Dual O2/CO2 Monitor provides constant monitoring with little to no adjustments, saving you time and money while allowing the monitor to operate seamlessly. Our quality sensors make this the longest lasting monitor on the market.

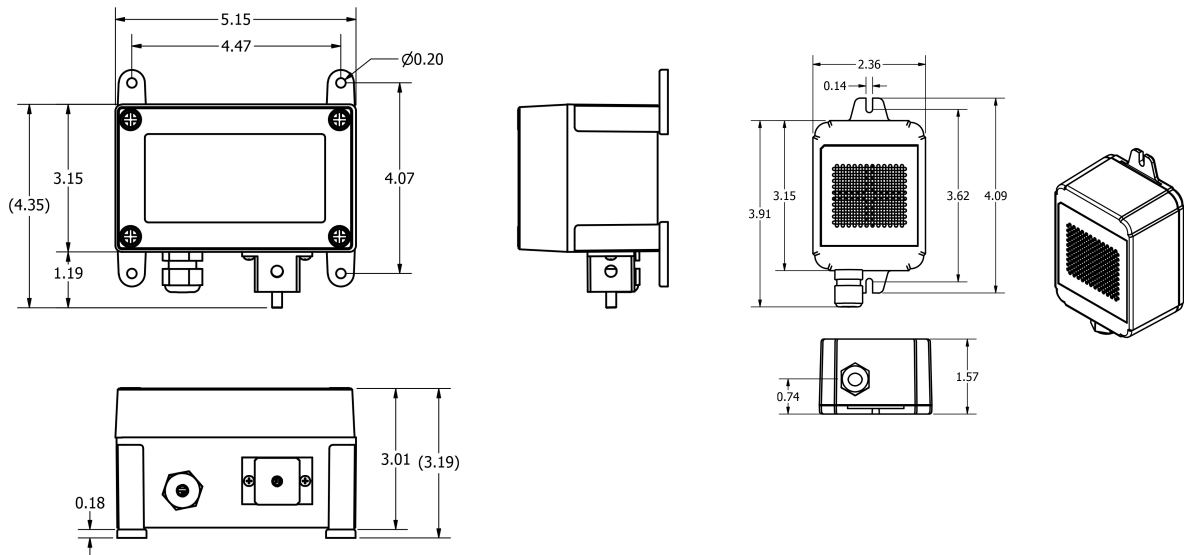

Top Accessories



**8 Channel Programmable
Controller for O2 or Gas
Monitors**

ITEM #: 99196



**Remote Digital
Display**

ITEM #: 99091



**Red Horn/
Strobe 24VDC**

ITEM #: 42002



1-905-335-6040

info@puritygas.ca
www.puritygas.ca

Purity Gas Inc.
10-1469 Sandhill Drive
Ancaster, ON L9G 0H7